



+49 6239 - 99 78 20
office@arcan.biz

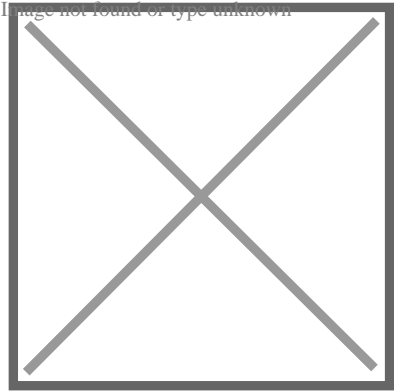

HOLLOW SCREED REPAIR

resins for reconnecting and fixing loose layers

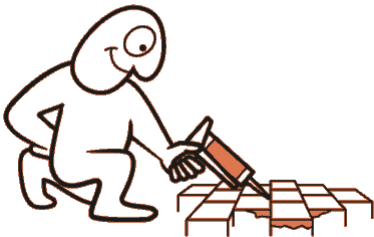

Fixing and reconnecting hollow screeds or tiles that have come loose from the substrate must be done with extreme care and the right materials. If too much pressure is applied or a foaming resin is used, the risk of lifting the tiles or the screed is very high. Our low viscosity injection resins are also suitable for damp substrates. There are special types that leave no traces when they come out of the tile joints because they are transparent and do not turn yellow over time or the resin that comes out can simply be removed with water before it hardens and the surface is not soiled.

HOLLOW SCREED REPAIR

PRODUCT NAME	TECHNOLOGY	APPLICATION	BENEFIT
HydroBloc AC 555	Acrylate Resin	Crack Injection	Low Temperature Use <0°C
		Facade Injection	Contact Grouting
	1 Comp. Pump	Working Joint Sealing	Cleaning With Water
		Honeycomb Concrete Injection	
		Injection Tube Injection	
		Contact Grouting	
		Internal Strengthening	
		Soil, Rock Stabilization	
		Waterproofing Injection	
		Hollow Screed, Tiles	

PRODUCT NAME

SiliBond 697

TECHNOLOGY

PUR Resin

Clear

UV Stable

APPLICATION

Facade Injection

Stain Protection

Hollow Screed, Tiles

Clear Coating

Crack Injection

Flexible Filling, Sealing

BENEFIT

UV Resistant

Weather Resistant

Underwater Resistant

Flexible

PRODUCT NAME

Silox Injection 810nt

TECHNOLOGY

Epoxy Resin

1 Component Pump

APPLICATION

Crack Injection

Honeycomb Concrete Injection

Injection Tube Injection

Contact Grouting

Internal Strengthening

Hollow Screed, Tiles

BENEFIT

Ultra Low Viscous

Potlife 5h

100% Reactive

PRODUCT NAME

Silox Injection 811nt

TECHNOLOGY

Epoxy Resin

1 Component Pump

APPLICATION

Crack Injection

Honeycomb Concrete Injection

Injection Tube

Contact Grouting

Internal Strengthening

Hollow Screed, Tiles

BENEFIT

Ultra Low Viscous

Potlife 2h

For Humidity

PRODUCT NAME

Silox Injection 812nt

TECHNOLOGY

Epoxy Resin

1 Component Pump

APPLICATION

Crack Injection

Honeycomb Concrete Injection

Injection Tube Injection

Contact Grouting

Internal Strengthening

Hollow Screed, Tiles

BENEFIT

Ultra Low Viscous

Potlife 1,5h

PRODUCT NAME

Silox Injection 814nt

TECHNOLOGY

Epoxy Resin

1 Component Pump

APPLICATION

Crack Injection

Honeycomb Concrete Injection

Injection Tube Injection

Contact Grouting

Internal Strengthening

Hollow Screed, Tiles

BENEFIT

Ultra Low Viscous

Pot Life 5h

Corrosion Protection

PRODUCT NAME

BOROX AC-1009

TECHNOLOGY

Acrylate Resin

1 Component Pump

APPLICATION

Facade Injection

Internal Strengthening

Soil, Rock Stabilization

Hollow Screed, Tiles

BENEFIT100% Solid Low Temperature Use
<0°C

Wet Environment

Ultra Low Viscous

UV-Resistant

ARCAN GmbH
Kleinniedesheimer Str. 19
D-67240 Bobenheim-Roxheim
Germany

+49 6239 - 99 78 20
office@arcan.biz
arcan.biz

