


+49 6239 - 99 78 20
office@arcan.biz



HYDROBLOC AC 555

injection resin for waterproofing and stabilisation

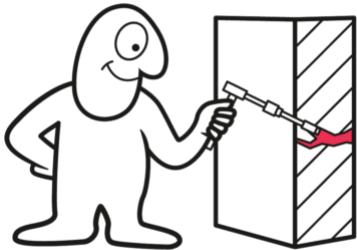

HydroBloc AC-555 is a low viscous, water friendly injection resin for waterproofing like crack injection, honeycomb sealing, working joint sealing and construction element waterproofing. The high strength makes AC-555 the first choice for strengthening, stabilisation and consolidation jobs. AC-555 is suitable for low temperature applications - Max. Frost -20°C! HydroBloc AC-555 combines Acrylate advantages with Epoxy resin strength.

HYDROBLOC AC 555

BENEFIT	APPLICATION	INSTALLATION	ACCESSORIE	PRODUCT INFO
Low Temperature Use <0°C	Crack Injection	1 Component Pump	Injection Packer	DOWNLOAD TDS
Contact Grouting	Facade Injection		Injection Pump 1 Comp.	REFERENCES
Cleaning With Water	Working Joint Sealing		Drill Hole Mortar	
	Honeycomb Concrete Injection		Injection Mortar	
	Injection Tube Injection		Waterstop Mortar	
	Contact Grouting		Sealing Slurry	
	Internal Strengthening			
	Soil, Rock Stabilization			
	Waterproofing Injection			
	Hollow Screed, Tiles			

ARCAN GmbH
Kleinniedesheimer Str. 19
D-67240 Bobenheim-Roxheim
Germany

 +49 6239 - 99 78 20
 office@arcan.biz
 arcan.biz

Image not found or type unknown

