


+49 6239 - 99 78 20
office@arcan.biz



HYDROBLOC INJEKT 583

injection resin for waterproofing and tube injection

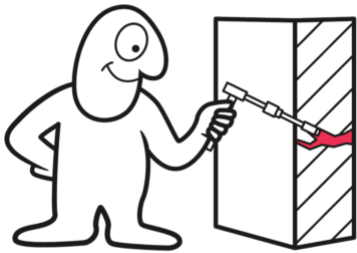

HydroBloc Injekt 583 is a water friendly injection resin for waterproofing injection, like crack injection, honeycomb sealing, working joint sealing and construction element waterproofing. The most important property is the use as injection tube resin for re-injectable tubes. Injekt 583 is a solid resin (no gel) and tube cleaning procedure executed with water only. HydroBloc Injekt 583 is water swellable, the auto repair effect adjust changes in joint or crack cross sections automatically. This is where rigid and non-swellable resins usually fail. Swellability is not equal to foaming. Swelling happens after final curing, when the material gets water contact. Additionally a corrosion prevention additive creates active reinforcement protection.

HYDROBLOC INJEKT 583

BENEFIT	APPLICATION	INSTALLATION	ACCESSORIE	PRODUCT INFO
Excellent Penetration	Crack Injection	1 Component Pump	Injection Packer	DOWNLOAD TDS
Low Temperature Use <0°C	Facade Injection	2 Component Pump	Injection Pump 1 comp.	REFERENCES
Swellable	Canal, Shaft Repair		Drill Hole Mortar	
Elastic	Feedthrough Sealing		Injection Mortar	
Corrosion Prevention	Foam Follow Up		Restoration Plaster	
Cleaning With Water	Working Joint Sealing		Sealing Slurry	
Non Foaming	Honeycomb Concrete Injection		Komprischaum 130	
Solid Resin-No Gel	Injection Tube Injection			
Suitable For Humidity	Waterstop			
	Waterproofing Injection			

ARCAN GmbH
Kleinniedesheimer Str. 19
D-67240 Bobenheim-Roxheim
Germany

 +49 6239 - 99 78 20
 office@arcan.biz
 arcan.biz

Image not found or type unknown

