



+49 6239 - 99 78 20
office@arcan.biz

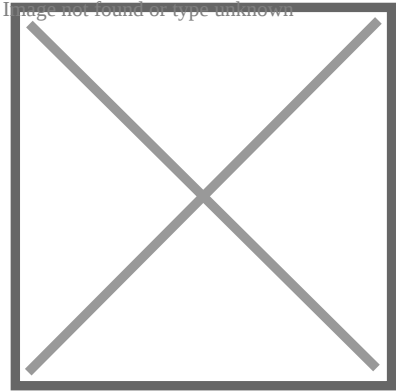

HYDROBLOC PU 507 E

elastic injection resin for waterproofing and stabilisation

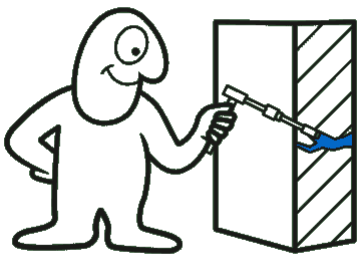

HydroBloc PU 507 very elastic injection resin for waterproofing and stabilisation. Low viscosity combined with excellent penetration and long processing time are perfectly suitable for crack injection, joint sealing, honeycomb sealing, injection tube injection and building element waterproofing and cavity filling. PU-507 is suitable for dry, wet and humid conditions. PU 507 create an elastic foam when in contact with humidity or water. The same material could be used as post-injection foam resin. (2 in 1 material). HydroBloc PU 507 is 100% solid and solvent free. User friendly mixing ratio (1:1) and long processing time for 1 component pump use, make working with HydroBloc PU 507 easy and comfortable.

HYDROBLOC PU 507 E

BENEFIT	APPLICATION	INSTALLATION	ACCESSORIE	PRODUCT INFO
Elastic	Crack Injection	1 Component Pump	Injection Packer	DOWNLOAD TDS
Low Viscous	Working Joint Sealing	2 Component Pump	Injection Pump 1	REFERENCES
2 in 1 Resin	Honeycomb Concrete Injection		Component	
	Injection Tube Injection		Jekto Gun 078 Liquid	
	Waterstop		Drill Hole Mortar	
	Foam Follow Up		Injection Mortar	
	Flexible Filling, Sealing		Equipment Cleaners	
			Komprischaum 130	
			Trennfix	

ARCAN GmbH
Kleinniedesheimer Str. 19
D-67240 Bobenheim-Roxheim
Germany

 +49 6239 - 99 78 20
 office@arcan.biz
 arcan.biz

Image not found or type unknown

