



+49 6239 - 99 78 20
office@arcan.biz

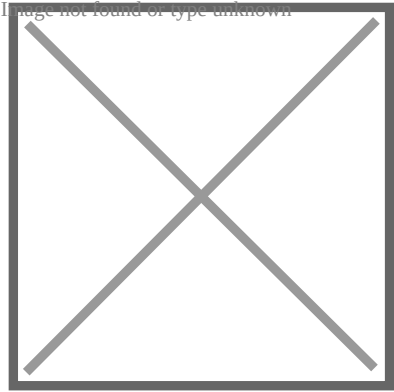

HYDROBLOC SI 700

horizontal barrier against raising damp, plus
stabilisation



HydroBloc SI 700 is the classic horizontal barrier system for capillary water stop. HydroBloc Si 700 operates with two modes of action. Silification and hydrophobisation of pores and capillaries. In the same step, the material strengthens weak joint mortars. This is particularly important in the preservation of historical monuments and buildings. The maximum water saturation level is 60%, if the level is higher choose HydroBloc SI 709. Below 50% water saturation a pressure less injection with a bottle system called Tröppel container is optional. For higher water saturation levels a pressure injection is mandatory.

HYDROBLOC SI 700

BENEFIT	APPLICATION	INSTALLATION	ACCESSORIE	PRODUCT INFO
Ready To Use	Horizontal Barrier	1 Component Pump	Injection Packer	DOWNLOAD TDS
Solvent Free	Surface Hydrophobisation	Pressureless Tröppel	Injection Pump 1	REFERENCES
Strengthening	Raising Damp Prevention	Flod	Component	
Silification	Primer	Spray	Drill Hole Mortar	
Hydrophobisation			Injection Mortar	
			Injection Bottles	
			Fluat Building Protection	
			Restoration Plaster	
			Restoration Paint	

ARCAN GmbH
Kleinniedesheimer Str. 19
D-67240 Bobenheim-Roxheim
Germany

 +49 6239 - 99 78 20
 office@arcan.biz
 arcan.biz

Image not found or type unknown

