


+49 6239 - 99 78 20
office@arcan.biz



ROKRYL 324

self-levelling repair mortar and coating, fast curing

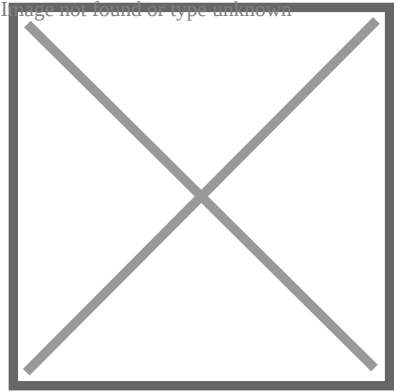

Rokryl 324 is a tough flexible MOPO mortar with many application areas. Due to the fast curing, high compressive strength and bending tensile strength, which combines Rokryl 324 with super adhesion and high strength make it a multi-purpose material for all types of renovation work. Used as anchor mortar for casting poles, anchors or other connections. As re-profile and repair mortar and the application as abrasion resistant coating on industrial floors.

ROKRYL 324

BENEFIT	APPLICATION	INSTALLATION	ACCESSORIE	PRODUCT INFO
Short Setting Time	Casting Mortar	Trowel	Rokryl 320	DOWNLOAD TDS
Use After 1 h	Coating- Non- Permeable	Squeegee		REFERENCES
Cures Till -10°C	Industrial Floor			
High Compressive Strength	Traffic Area			
High Bending Tensile Strength	Repair Mortar			

ARCAN GmbH
Kleinniedesheimer Str. 19
D-67240 Bobenheim-Roxheim
Germany

 +49 6239 - 99 78 20
 office@arcan.biz
 arcan.biz

Image not found or type unknown

