



+49 6239 - 99 78 20
office@arcan.biz

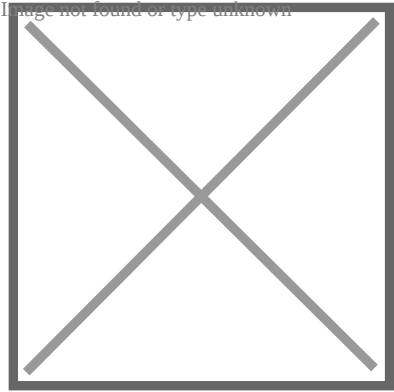

ROKRYL 326-THIX

thickened, flexible PMMA for cracks and joints in sloping surfaces

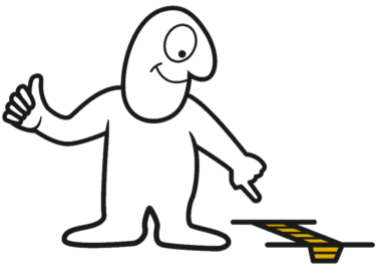

Rokryl 326-Thix is a casting resin for cracks, working and dilatation joints. The flexible PMMA resin, cures even below 0°C to an elastic polymer, with high strength and super adhesion. Rokryl 326 is UV resistant and a the thixotropic version - thickened perfect for sloping surfaces.

ROKRYL 326-THIX

BENEFIT	APPLICATION	INSTALLATION	ACCESSORIE	PRODUCT INFO
Thickened – Thixotropic	Joint, Crack Sealing	Casting	Rokryl Härter 330	DOWNLOAD TDS
Elastic	Working Joints		Rokryl 320	REFERENCES
UV Resistant	Dilatation Joints			
No Yellowing	On Concrete			
Super Adhesion	On Screed			
Cures < 0°C				
Fast Curing				

ARCAN GmbH
Kleinniedesheimer Str. 19
D-67240 Bobenheim-Roxheim
Germany

+49 6239 - 99 78 20
office@arcan.biz
arcan.biz

