



+49 6239 - 99 78 20
office@arcan.biz

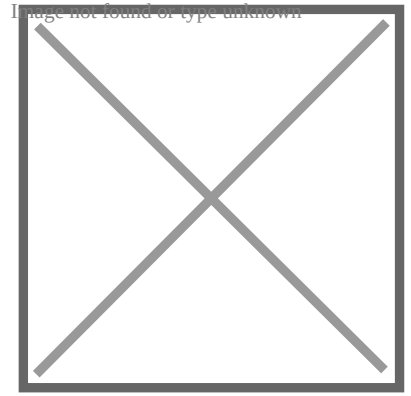

SILIBOND LSI-725

Surface strengthening without film creation for walls and floors

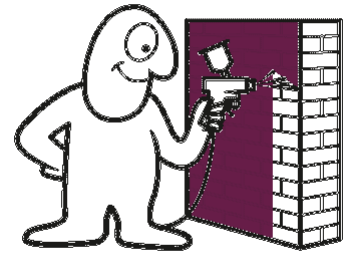

Silibond LSI-725 stabilises weathered and worn building materials and protects it against acid rain. The inorganic silicate impregnation material contains nanoparticles, which penetrate deep into the structure where they supplement the missing binding agents and create new stability. SiliBond LSi-725 doesn't create a film or a shell on the surface, the material is still breathable. The 1 component system, doesn't change the appearance or the colour, it doesn't contain water soluble side products which could lead to efflorescence. SiliBond LSI-725 is suitable for the stabilisation of sucking stones, plasters, joint mortars and concrete. Do not use on weak sucking materials. The strengthening effect develops over 1 - 2 days time.

SILIBOND LSI-725

BENEFIT	APPLICATION	INSTALLATION	ACCESSORIE	PRODUCT INFO
Excellent Penetration	Surface Strengthening	Spray	Surface Hydrophobisation	DOWNLOAD TDS
No Film Formation	Surface Enhancement	Flood	Cleaning Agents For Surface	REFERENCES
1 Component	Surface Protection	Paint		
Perfect Penetration	On Concrete			
Permeable	On Natural Stone			
No Color Change	On Plaster			
Silicate Binding Agent	For Joint Mortar			
Acid Resistant				

ARCAN GmbH
Kleinniedesheimer Str. 19
D-67240 Bobenheim-Roxheim
Germany

 +49 6239 - 99 78 20
 office@arcan.biz
 arcan.biz

Image not found or type unknown

