


+49 6239 - 99 78 20
office@arcan.biz



SILEX WATERPLUG 932.2

waterstop mortar, fast setting

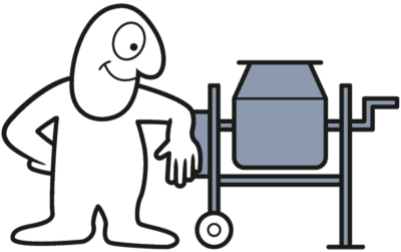

Water stop mortar for stopping fast flowing water. Silex Waterplug 932.2 hardens without crack formation. Application on vertical or horizontal surfaces without sluice danger. Silex Waterplug 932.2 cures in 30 - 40 seconds. Used as paste or directly on the leakage without pre-mixing.

SILEX WATERPLUG 932.2

BENEFIT	APPLICATION	INSTALLATION	ACCESSORIE	PRODUCT INFO
Setting 30 – 40 Seconds	Waterstop Mortar	Manual	Injection Foams HydroBloc Rapid 570 PUR Resins	DOWNLOAD TDS REFERENCES

ARCAN GmbH
Kleinniedesheimer Str. 19
D-67240 Bobenheim-Roxheim
Germany

+49 6239 - 99 78 20
office@arcan.biz
arcan.biz

